



## FL485

### RS-485 Signal Surge Protector

- Support 1 RS-485 signal input and output, and provide 5kA surge protection
- Adopt multilevel protective circuit with quick response and low residual voltage output
- Response time is less than 1ns
- Applicable rate 1Mbps
- Metal housing, great sealing, and resistant to dust and corrosion



## Introduction


FL485 signal surge protector is designed by IEC61000-4-5 and ITU-TK20&K21 standard. It adopts multilevel protective circuit and the newest high-speed surge protection device which has quick response, low residual voltage output and excellent transmission performance. The interface adopts standard industrial terminal blocks which is easy to use and suit for all lightning protection in RS-485 communication field.

FL485 signal lightning protector is designed and manufactured on the principle of discharge, limited current, clamping, stabilivolt. When signal wire gets an overvoltage and overcurrent shock, it will put lightning power or its jamming signal into the ground. Overvoltage restriction enables electrical equipment to operate safely within allowable range.

This product adopts metal housing and good sealing, which has anti-dust and anti-corrosion function. It adopts serials connection that can restrain high voltage pulse on the wire to prevent backend device from being damaged by lightning and industrial surge. It can be widely used in remote control and transmission of security monitoring device, digital public broadcast system, water/electricity/gas meter of intelligent community, instrument and all kinds of fields that use RS-485 industrial bus control.

## Dimension

Unit:mm

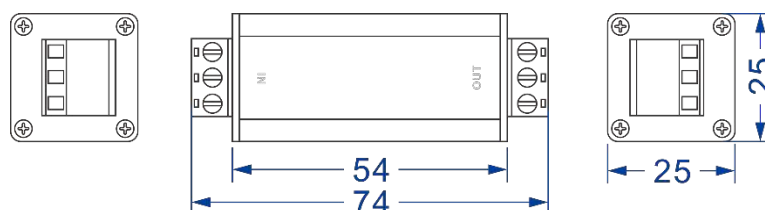

## Specification

Serial Port	<p>Standard: EIA RS-485、IEC 61000-4-5、ITU-TK20&amp;K21</p> <p>Serial port quantity: 1 RS-485 serial port input and output</p> <p>RS-485 signal: A, B</p> <p>Interface form: 3-pin industrial terminal blocks</p> <p>Impact and over-current withstanding: <math>\leq 5\text{kA}</math> (8/20<math>\mu\text{s}</math> simulated lightning waveform)</p> <p>Operating voltage: 0~5V</p> <p>Limited voltage: <math>\leq 15\text{V}</math></p> <p>Applicable rate: 1Mbps</p>
-------------	--

	Insertion loss: $\leq 0.5\text{dB}$ Response time: $\leq 1\text{ns}$
Power Supply / Power Consumption	No
Environmental Limit	Operating temperature: $-20\sim 60^{\circ}\text{C}$ Storage temperature: $-25\sim 85^{\circ}\text{C}$ Relative humidity: 5% ~ 95% (no condensation)
Physical Characteristic	Housing: metal Dimension (W x H x D): 74mm×25mm×25mm Weight: 50g
Certification	CE, FCC, RoHS
Warranty	1 year



## Ordering Information

Available Models	RS-485 (Input)	RS-485 (Output)	Power Supply
FL485	1	1	No



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: [ics@3onedata.com](mailto:ics@3onedata.com)

Website: [www.3onedata.com](http://www.3onedata.com)

◀ [Please scan our QR code for more details](#)

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.