



Join our
IoT WORLD
#WeAreIoTConnectivity

MTX-T

Basic 4G/3G Programmable IoT modem

MTX-T is an innovative and powerful all-in-one solution for the most demanding M2M and IoT applications, enabling 2G/3G/4G high speed data transmission, CSD and SMS. MTX-T are Java J2ME programmable and have many interfaces (RS232, RS485, mini USB, 1x digital input) avoiding need for further hardware, shortening time to market and reducing costs. It is also compatible with MTX-Tunnel, a firmware that can be executed in our MTX modems to use them as powerful gateways or routers.



MAIN FEATURES



4G/3G/2G



USB 2.0



RS232



RS485



Digital input



Legacy communic.



4G/3G/2G serial gateway



GPIO management



Relays management



DynDNS and No-IP



MQTT/s



Modbus & Datalogger



SMS control

● Hardware features

● MTX-Tunnel software features

CERVELLO STEM - IOT PLATFORM FREE FOR ONE YEAR WITH MTX DEVICES*



Autoprovisioning



Alarms and Alerts



Remote Control



Real time Dashboards



Rules engine



Monitoring engine



Analytics



Remote update







*Available with compatible devices that have MTX-Tunnel or MTX-Titan

- ⚡ DC input: 6.5 to 40 Vdc
- 🌡️ Temperature range: -30° to +85°C
- 📏 Dimensions: 78.1x66.8x37.2mm
- ⚖️ Weight: <190gr









Datasheet subject to changes | 2020/05
MTX © by MATRIX ELECTRONICA S.L.U.
SUPPORT: iotsupport@mtx2m.com
SALES: info@mtx2m.com
mtx2m.com









HARDWARE FEATURES

	MTX-T 4G	MTX-T 3G	MTX-T 2G
	LTE 5 Bands (700, 800, 900, 1800, 2100MHz), GSM/GPRS/EDGE: 2 Bands (900, 1800MHz)	HSPA+: 5 Bands (800, 850, 900, 1900, 2100MHz), GSM/GPRS/EDGE: 4 Bands (850, 900, 1800, 1900MHz)	GSM 4 Bands (850, 900, 1800, 1900MHz), release 6
	LTE Cat.1: DL 10.2Mbps, UL 5.2Mbps		
	HSPA: DL 7.2Mbps, UL 5.7Mbps UMTS PS: DL 384Mbps, UL 384 Mbps, CS: DL 64Mbps, UL 64Mbps	HSPA (3GPP release 7): DL 7.2Mbps, UL 5.7Mbps; HSDPA Cat.8/HSUPA Cat.6	
	EDGE Class 12 data rates, DL: max. 237 kbps, UL: max. 237 kbps GPRS Class 12 data rates, DL: max. 85.6 kbps, UL: max. 85.6 kbps	EDGE Class 12 data rates, DL: max. 237 kbps, UL: max. 237 kbps GPRS Class 12 data rates, DL: max. 85.6 kbps, UL: max. 85.6 kbps	EDGE Class 12 data rates, DL: max. 237 kbps, UL: max. 237 kbps GPRS Class 12 data rates, DL: max. 85.6 kbps, UL: max. 85.6 kbps
	CSD data transmission up to 9.6 kbps, V.110, non-transparent	CSD data transmission up to 9.6 kbps, V.110, non-transparent	CSD data transmission up to 9.6 kbps, V.110, non-transparent
	SMS: text and PDU mode support, point-to-point MO and MT, cell broadcast	SMS: text and PDU mode support, point-to-point MO and MT, cell broadcast	SMS: text and PDU mode support, point-to-point MO and MT, cell broadcast

Interfaces

-  4G/3G/2G connectivity
-  SIM card interface 1.8V and 3V
-  RS232
-  RS485
-  1x digital input
-  Power supply
-  GPS module (optional)
-  Operating status LEDs

Connectors



-  2x SMA F antenna connector: 4G
-  1x SMA F antenna connector: 3G/2G
-  1x SMA F antenna connector: GPS
-  Mini USB B
-  DB9 female connector: RS232
-  5-way plug-in: RS485, power supply and digital input

Processor






	4G	3G	2G
Flash	31MB	10MB	10MB
RAM	18MB	10MB	10MB
CPU	ARM11	ARM11	ARM11

MTX-TUNNEL SOFTWARE FEATURES





Connectivity

-  4G/3G/2G serial gateways: TCP client, TCP server, UDP client/server, accept incoming CSD calls, up to 2 simultaneous tunnel
-  IP connectivity mode: permanent 100% time, under request (SMS, missed call), change on a digital input, analog input out of level, serial data on RS232/RS485 port, scheduled date/hour/time






TCP Services

-  Web server, Telnet, SNMP, Tacacs+, NTP
-  Datalogger: MQTT, MQTTs, HTTP, HTTPs, FTP
-  Shows the status of digital and analog inputs
-  Change digital output level and relays
-  Execute AT commands remotely: Telnet, MQTT/MQTTs, SMS, HTTP




Security

-  Authorized phone numbers
-  Firewall IP, SSL/TLS connections, encrypted config
-  Secure OTAP (remote FIU upgrade)
-  Watchdog hardware






Alarms and Control

-  Send SMS/MQTT alarm when the level of digital or analog input change
-  SMS can be sent to up to 10 remote users
-  Execute remote AT commands
-  Change the status of digital outputs & relays
-  Customizable SMS commands

Solutions for Dynamic IP

-  IP session using a SMS or missed call
-  DynDNS and NoIP
-  Private DNS


Metering, Modbus, Sensors...

-  868 MHz remote monitoring sensors (Wavenis)
-  Master for modbus RTU devices, Modbus TCP slave, Modbus TCP to RTU gateway
-  Relays control
-  Access to serial devices using 2G/3G/4G and GSM
-  Astronomical clock

ORDERING INFORMATION

MTX-T [2 N]	199801421	MTX-T [4-N] (4G/2G)	199801424
MTX-T [3 N]	199801422	MTX-T [4 N]	199801445



MTX - T [X - Options]

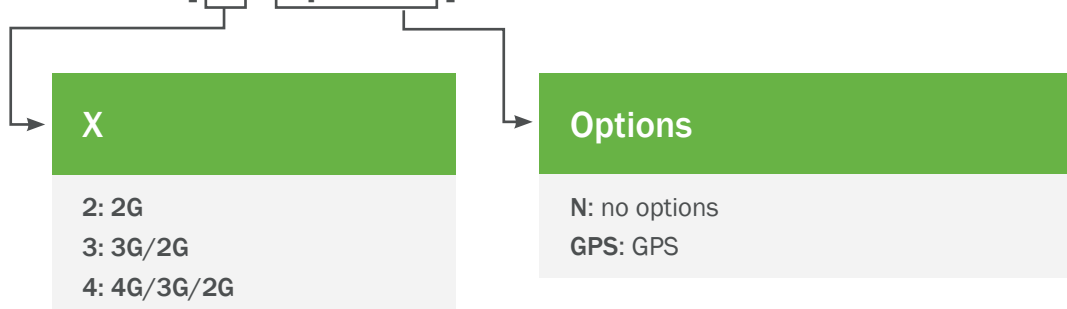







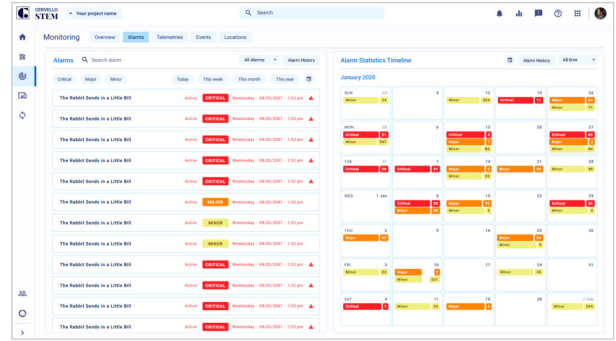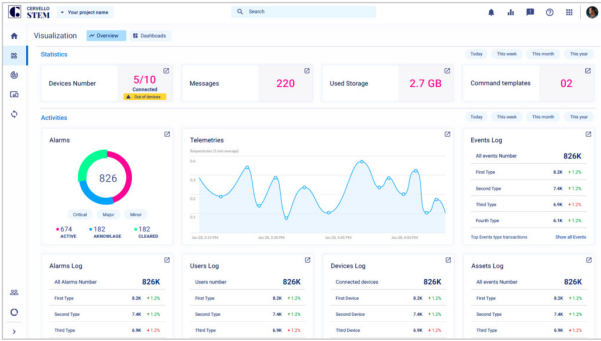









CERVELLO STEM - IOT PLATFORM



FREE FOR ONE YEAR WITH MTX DEVICES**





General Features

-  Up to unlimited devices
-  Autoprovisioning
-  Real time dashboards
-  Remote control
-  Monitoring engine
-  Alarms and alerts
-  Rules engine
-  Remote update
-  Connect engine*
-  API Keys*
-  Analytics*
-  Multi-tenant*
-  White labeling*
-  Custom admin role*




Monitor

-  Alarms, Events and Incidents
-  Tracking*




Control

-  Command template
-  OTA



Devices Inventory

-  Add single and single from template
-  Add Bulk from template and from autoprovisioning
-  Manage: Device template, Groups, Assets and Bulk actions




Connect

-  Topics*
-  Transformation*
-  Integration keys*




Visualize

-  Dashboards
-  Reports

Automate

-  Rules Engine
-  Actions
-  Triggers

Security

-  2-factor authentication
-  SSL for end user application
-  Custom admin roles*

*Upgrade required

**Available with compatible devices with MTX-Tunnel or MTX-Titan

